


1. Test Procedure

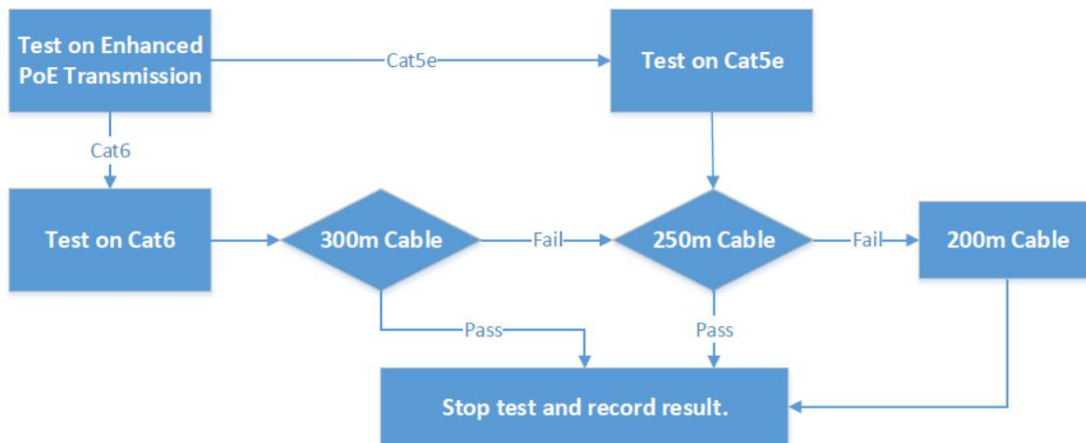

2. Test Environment

- i. NVR: -I/-K series PoE NVR with firmware version v3.4.92 is used in the test..
- ii. IP Camera: power consumption of IP camera shall not exceed 8w, and the recording bitrates of IP camera (including both main and sub stream) shall be less than 6Mbps.
- iii. Network cable: Hikvision Cat5e and Cat6 cable are used in test.
- iv. Test scenario: The test is carried out on work station located in Hikvision test lab.

3. Tested IPC List

Tested IPC Model	-K1 series PoE NVR		-K2/-K4/-I series PoE NVR	
	Cat5e	Cat6	Cat5e	Cat6
DS-2CD2083G0-I	200m	200m	250m	250m
DS-2CD2063G0-I	200m	200m	250m	250m
DS-2CD2043G0-I	200m	200m	250m	250m
DS-2CD2023G0-I	200m	200m	250m	250m
DS-2CD2183G0-I	200m	200m	250m	250m
DS-2CD2183G0-IS	200m	200m	250m	250m
DS-2CD2163G0-I	200m	200m	250m	250m
DS-2CD2163G0-IS	200m	200m	250m	250m
DS-2CD2143G0-I	200m	200m	250m	250m
DS-2CD2143G0-IS	200m	200m	250m	250m
DS-2CD2123G0-I	200m	200m	250m	250m
DS-2CD2123G0-IS	200m	200m	250m	250m
DS-2CD2383G0-I	200m	200m	250m	250m
DS-2CD2363G0-I	200m	200m	250m	250m
DS-2CD2343G0-I	200m	200m	250m	250m
DS-2CD2323G0-I	200m	200m	250m	250m

DS-2CD2T23G0-I5	200m	200m	250m	250m
DS-2CD2085FWD-I	200m	200m	250m	250m
DS-2CD2055FWD-I	200m	200m	250m	250m
DS-2CD2035FWD-I	200m	200m	250m	250m
DS-2CD2025FWD-I	200m	200m	250m	250m
DS-2CD2185FWD-IS	200m	200m	250m	250m
DS-2CD2185FWD-I	200m	200m	250m	250m
DS-2CD2155FWD-IS	200m	200m	250m	250m
DS-2CD2155FWD-I	200m	200m	250m	250m
DS-2CD2135FWD-IS	200m	200m	250m	250m
DS-2CD2135FWD-I	200m	200m	250m	250m
DS-2CD2125FWD-IS	200m	200m	250m	250m
DS-2CD2125FWD-I	200m	200m	250m	250m
DS-2CD2385FWD-I	200m	200m	250m	250m
DS-2CD2355FWD-I	200m	200m	250m	250m
DS-2CD2335FWD-I	200m	200m	250m	250m
DS-2CD2325FWD-I	200m	200m	250m	250m
DS-2CD2955FWD-IS	250m	250m	200m	200m
DS-2CD2955FWD-I	250m	250m	200m	200m
DS-2CD2935FWD-IS	250m	250m	200m	200m
DS-2CD2955FWD-I	250m	250m	200m	200m
DS-2CD2T25FWD-I5	200m	200m	250m	250m
DS-2CD2020F-IW	250m	300m	200m	200m
DS-2CD2020F-IW	250m	300m	200m	200m
DS-2CD2020F-I	250m	300m	200m	200m
DS-2CD2020-I	250m	300m	200m	200m
DS-2CD2010F-IW	250m	300m	200m	200m
DS-2CD2010F-I	250m	300m	200m	200m
DS-2CD2120F-IWS	250m	300m	250m	300m
DS-2CD2120F-IW	250m	300m	250m	300m
DS-2CD2120F-IS	250m	300m	250m	300m
DS-2CD2120F-I	250m	300m	250m	300m

DS-2CD2110F-IWS	250m	300m	250m	300m
DS-2CD2110F-IW	250m	300m	250m	300m
DS-2CD2110F-IS	250m	300m	250m	300m
DS-2CD2110F-I	250m	300m	250m	300m
DS-2CD2420F-IW	250m	300m	250m	250m
DS-2CD2410F-IW	250m	300m	250m	250m
DS-2CD2520F	250m	300m	250m	300m
DS-2CD2510F	250m	300m	250m	300m
DS-2CD2620F-IS	250m	300m	250m	300m
DS-2CD2620F-I	250m	300m	250m	300m
DS-2CD2610F-IS	250m	300m	250m	300m
DS-2CD2610F-I	250m	300m	250m	300m
DS-2CD2720F-IS	250m	300m	250m	300m
DS-2CD2720F-I	250m	300m	250m	300m
DS-2CD2710F-IS	250m	300m	250m	300m
DS-2CD2710F-I	250m	300m	250m	300m
DS-2CD2E20F-W	250m	300m	250m	300m
DS-2CD2E20F	250m	300m	250m	300m
DS-2CD2E10F-W	250m	300m	250m	300m
DS-2CD2E10F	250m	300m	250m	300m
DS-2CD2342WD-I	250m	300m	250m	300m
DS-2CD2352-I	250m	300m	250m	300m
DS-2CD2522FWD-I	250m	300m	250m	300m
DS-2CD2522FWD-IS	250m	300m	250m	300m
DS-2CD2522FWD-IW	250m	300m	250m	300m
DS-2CD2522FWD-IWS	250m	300m	250m	300m
DS-2CD2542FWD-I	250m	300m	250m	300m
DS-2CD2542FWD-IS	250m	300m	250m	300m
DS-2CD2542FWD-IW	250m	300m	250m	300m
DS-2CD2542FWD-IWS	250m	300m	250m	300m
DS-2CD2622FWD-I	250m	300m	250m	300m
DS-2CD2622FWD-IS	250m	300m	250m	300m

DS-2CD2622FWD-IZ	250m	300m	250m	300m
DS-2CD2622FWD-IZS	250m	300m	250m	300m
DS-2CD2642FWD-I	250m	300m	250m	300m
DS-2CD2642FWD-IS	250m	300m	250m	300m
DS-2CD2722FWD-I	250m	300m	250m	300m
DS-2CD2722FWD-IS	250m	300m	250m	300m
DS-2CD2722FWD-IZ	250m	300m	250m	300m
DS-2CD2722FWD-IZS	250m	300m	250m	300m
DS-2CD2742FWD-I	250m	300m	250m	300m
DS-2CD2742FWD-IS	250m	300m	250m	300m
DS-2CD2942F	250m	300m	250m	300m
DS-2CD2942F-I	250m	300m	250m	300m
DS-2CD2942F-IS	250m	300m	250m	300m
DS-2CD2942F-IW	250m	300m	250m	300m
DS-2CD2942F-IWS	250m	300m	250m	300m
DS-2CD2T22WD-I5	250m	300m	250m	300m
DS-2CD2T22WD-I8	250m	300m	250m	300m
DS-2CD2T42WD-I5	250m	300m	250m	300m