

# T30TURBOEXIR

Turbo HD EXIR Dome Camera



## ► Camera



Image Sensor	3MP CMOS Image Sensor
Effective Pixels	2052(H)*1536(V)
Min. illumination	0.01 Lux @ (F1.2,AGC ON),0 Lux with IR
Shutter Time	1/25(1/30)s to 1/50,000s
Lens	3.6mm Angle of View: 67.8°(3.6mm)
Lens Mount	M12
Day & Night	ICR
Angle Adjustment	Pan: 0°- 360°; Tilt: 0°- 75°; Rotate: 0°- 360°
Synchronization	Internal Synchronization
Video Frame Rate	1920×1536@18fps
HD Video Output	1 Analog HD output
S/N Ratio	>62dB

## ► General

Operating Conditions	-40 °C – 60 °C (-40 °F – 140 °F), Humidity 90% or less (non-condensing)
Power Supply	12 VDC±15%
Power Consumption	Max. 5W
Protection Level	IP66
IR Range	Up to 40m
Communication	Up the coax, Protocol: HIKVISION-C (TVI output)
Dimensions	Ø 110mm×93.2mm (Ø 4.33"×3.67")
Weight	Approx. 350g (0.77lb)

## ► Menú

AGC	Support
D/N Mode	Color/BW/SMART
White Balance	ATW/ MWB
BLC	Support
Functions	Digital noise reduction, Mirror, SMART IR

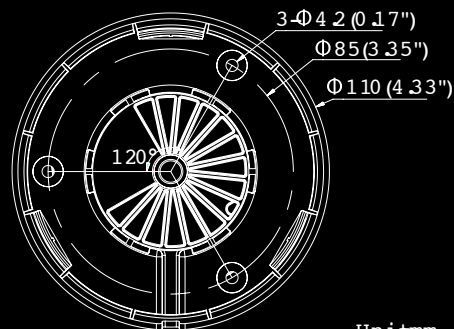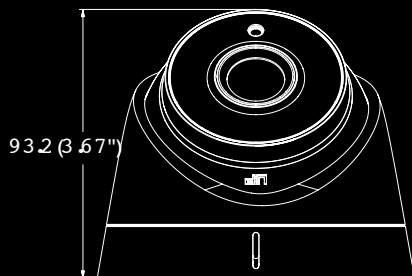

epcom®

TURBOHD 30